




TEMTEX™ 600/Alfol

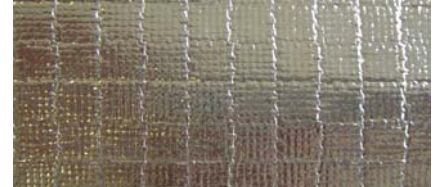

Description	Square weave glass fabric with a protective, highly reflective and fire-resistant aluminium foil on one side.			
Applications	- Insulation mattresses		- Reflective shields	
	- Gloves		- Protective clothing	
Approvals				
Characteristics of Temtex 600/Alfol				Test method
Total weight	g / m ²	670	± 5%	
Width (std)	mm	1000	± 10	DIN 53851
Thickness	mm	0.58	± 0.05	ISO 4603
Roll length (std)	m	50		
Max. application temperature	°C	Radiation: 1000 Contact: 180		
Remarks				

Fabric structure				
	Unit	Data	Tolerance	Test method
Base fabric		E-Glass		
Weight	g / m ²	600	± 5%	DIN 53854
Weave		Check		
Setting	per cm	14.0 x 14.0	± 3%	DIN 53853
Warp	Tex	EC9-68 S x 3	± 5%	DIN 60850 T.2
Weft	Tex	EC9-68 S x 3	± 5%	DIN 60850 T.2
Tensile strength (warp x weft)	N/cm	1000 x 1000		DIN 53857
Coating / Finish		Aluminum foil (10 µ)		
Weight	g / m ²	70	± 5%	
1 or 2 sided		1		

Tensile strength data refers to loomstate fabrics. Stability, thickness and surface weight vary according to the type of fabric finish. The given values are approximate and not guaranteed.